


Performance curve


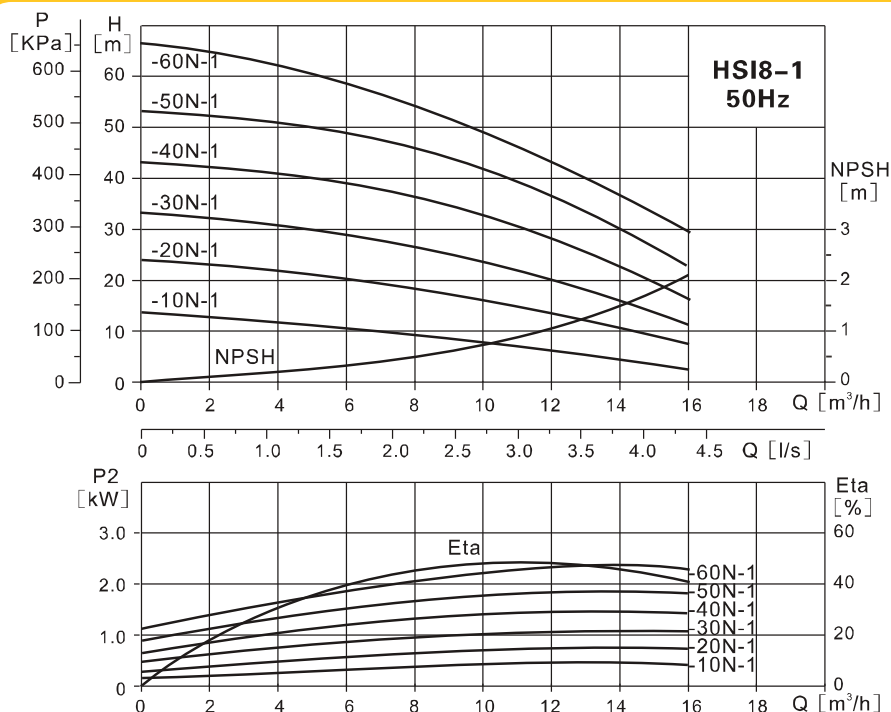


Performance table

MODEL	Driving motor P2(kW)	Q (m³/h)	4.0	6.0	8.0	10	12	14	16
HSI8-10N-1	0.55	H (m)	11	10	9	8	7	6	5
HSI8-20N-1	0.75		22	20	19	18	13	11	8
HSI8-30N-1	1.1		31	29	26	24	20	16	11
HSI8-40N-1	1.5		41	39	37	33	28	23	17
HSI8-50N-1	2.2		51	49	46.5	42	37	30	23
HSI8-60N-1	3.0		62	58	52	48	42	36	30

Installation sketch

MODEL	SIZE(mm)										Weight (Kg)
	Single Phase					Three Phase					
	L	L1	L2	H	D	L	L1	L2	H	D	
HSI8-10N-1	315	96	78	240	165	315	96	78	218	165	13
HSI8-20N-1	345	126	108	240	165	345	126	108	218	165	14
HSI8-30N-1	410	156	138	255	165	410	156	138	228	165	18
HSI8-40N-1	440	186	168	255	165	440	186	168	228	165	19
HSI8-50N-1	510	216	198	235	176	470	216	198	228	165	27
HSI8-60N-1	—	—	—	—	—	558	276	228	235	165	30

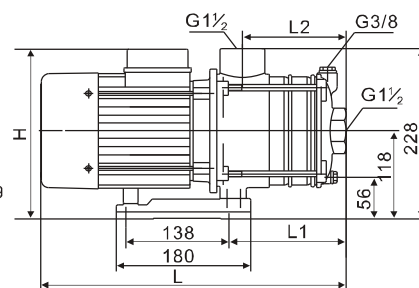

Pump cover with G2 inlet/outlet is available