





Performance curve ISO9906 Annex A 2900rpm

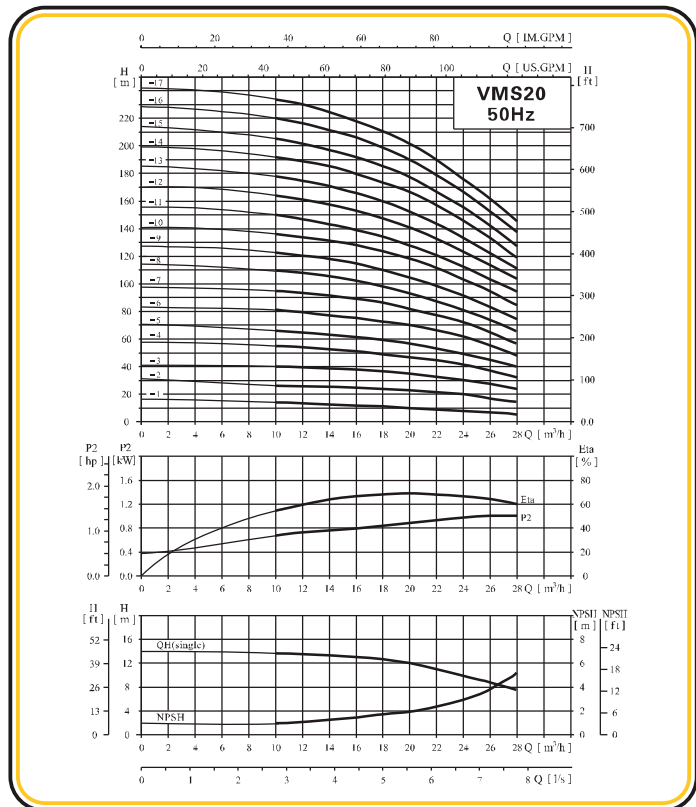

VMS 20

Installation sketch

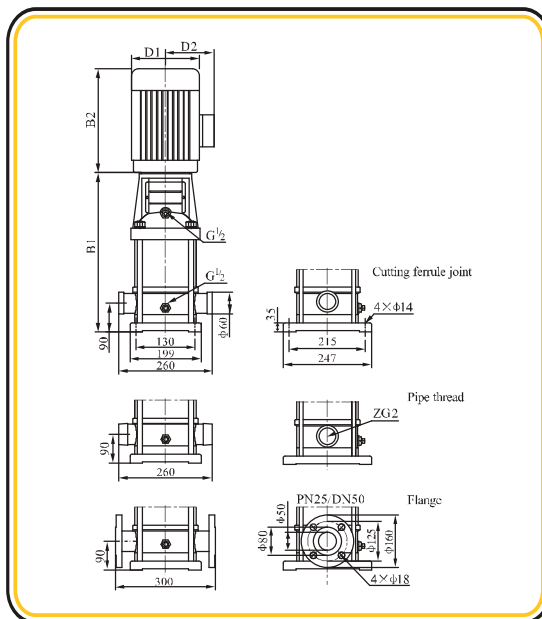

Performance table

Model	Driving motor		Q (m³/h)	Q											
	(kw)	(hp)		10	12	14	16	18	20	22	24	26	28		
VMS20-10	1.1	1.5		13.5	13	12.5	12	11	10	9	8	7	6		
VMS20-20	2.2	3		27	26.5	26	25	24	23	22	20	18	15		
VMS20-30	4.0	5.5		40	39.5	39	38	37	35	33	30	27	24		
VMS20-40	5.5	7.5		54	53	52	51	49	47	44	41	37	33		
VMS20-50	5.5	7.5		67	66	64	62	60	58	55	50	45	40		
VMS20-60	7.5	10	H (m)	81	79	77	75	73	70	66	61	55	49		
VMS20-70	7.5	10		95	93	91	89	86	82	77	71	65	58		
VMS20-80	11	15		109	107	105	102	99	94	89	82	75	67		
VMS20-100	11	15		136	134	131	128	124	118	111	103	95	85		
VMS20-120	15	20		164	162	158	154	149	142	133	124	114	102		
VMS20-140	15	20		192	189	185	180	174	166	156	145	133	119		
VMS20-170	18.5	25		234	230	225	219	212	202	190	177	162	145		

Size and weight

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
VMS20-10	387	245	632	170	142	33
VMS20-20	397	290	687	190	155	42
VMS20-30	452	335	787	230	188	58
VMS20-40	517	430	947	260	208	74
VMS20-50	562	430	992	260	208	76
VMS20-60	607	430	1037	260	208	82
VMS20-70	652	430	1082	260	208	84
VMS20-80	785	490	1275	330	255	153
VMS20-100	875	490	1365	330	255	157
VMS20-120	965	490	1455	330	255	170
VMS20-140	1055	490	1545	330	255	172
VMS20-170	1190	550	1740	330	255	195

The overall dimensions of the single-phase motor and explosion-proof motor are a little different.

Pls contact us for details.