
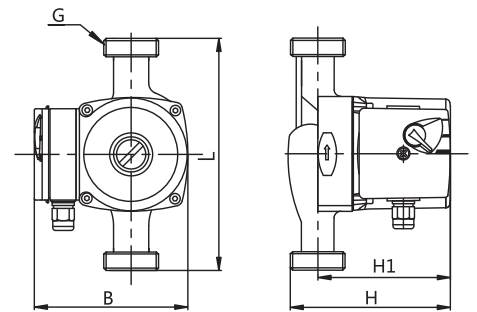


## UPD25 - 6S

### Performance curve

UPD 25-6S

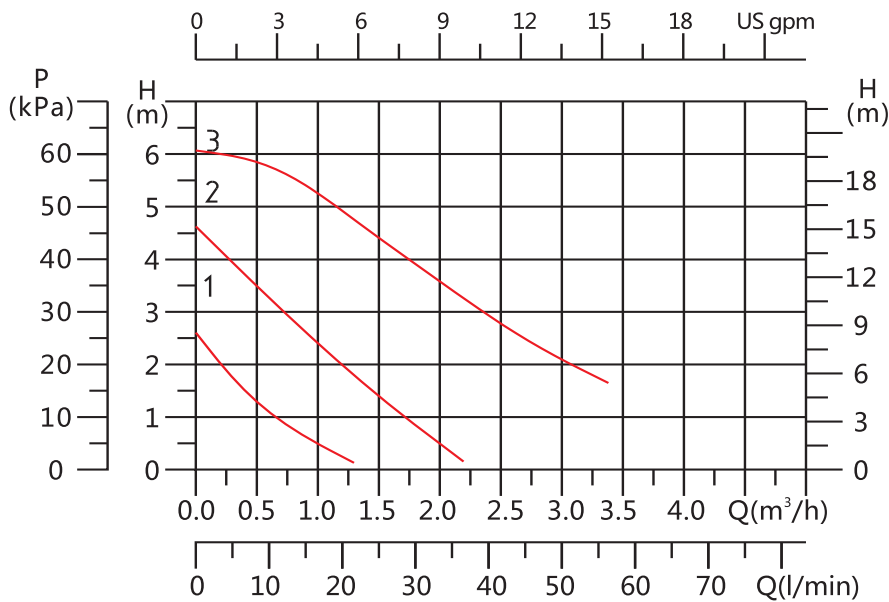

### Performance table

| Model      | Max. Flow<br>(m³/h) | Power<br>(W) | Rated Flow<br>(m³/h) | Rated Head<br>(m) | Rated Current (A) |      | Voltage (V) |     | Material of Pump Housing |         |        |                 |
|------------|---------------------|--------------|----------------------|-------------------|-------------------|------|-------------|-----|--------------------------|---------|--------|-----------------|
|            |                     |              |                      |                   | 115V              | 230V | 115         | 230 | Cast Iron                | Plastic | Copper | Stainless Steel |
| UPD25 - 6S | 3.0                 | 100          | 2.0                  | 3.5               | 0.9               | 0.45 | ●           | ●   | ●                        |         |        |                 |

| Model      | Dimension |     |     |     |      | Weight (Kg) |     | Connection / Flange | Package Size (mm x mm x mm) |
|------------|-----------|-----|-----|-----|------|-------------|-----|---------------------|-----------------------------|
|            | L         | H   | H1  | B   | G    | N.W         | G.W |                     |                             |
| UPD25 - 6S | 180       | 130 | 105 | 130 | 1 ½" | 2.6         | 3.2 | 1 ½" - 1"           | 420 x 300 x 310             |

Net Weight: Weight of pump, accessory not included.

Gross Weight: Manual, connection and package included.

● Represents optional product specifications