



SS4 - 5 - 0.08

Performance curve

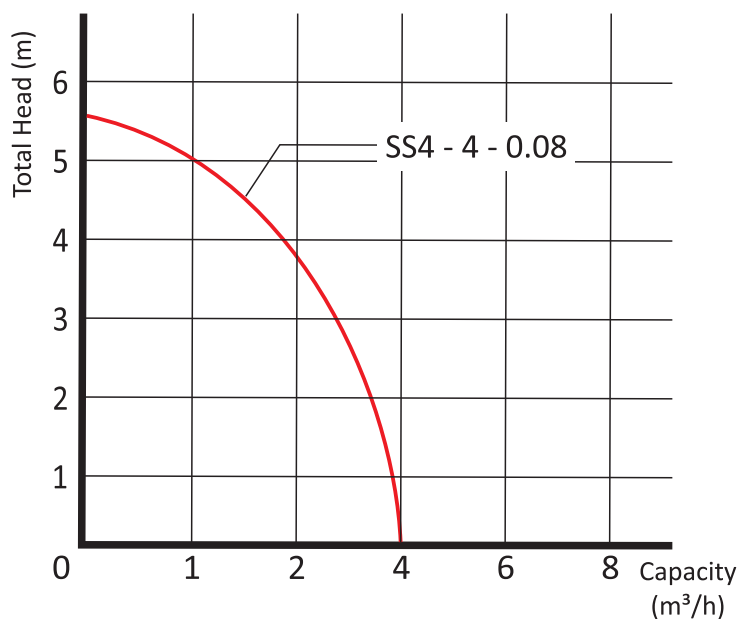

1	Cable	16	Fan-slice	31	"O" Ring
2	Screw	17	Mechanical Seal	32	Oil
3	Cable Protector	18	Connector	33	"O" Ring
4	"O" Ring	19	Screw	34	Water Tank
5	Capacitor	20	Seal	35	Motor Frame
6	Capacitor Cover	21	Key	36	Grounding Screw
7	Spring Washer	22	Self-taping Screw	37	Name Plate
8	Nut	23	Cover	38	Top Cover
9	Screw	24	Self-taping Screw	39	Cable Protector
10	Thermal Protector	25	Nut	40	Plug
11	Pushing	26	Washer	41	"O" Ring
12	Stator	27	Impeller	42	Connector Cover
13	Bolt	28	Filter Mesh	43	"O" Ring
14	Rotor	29	Nut	44	Outlet Connector
15	Bearing	30	"O" Ring	45	Handle

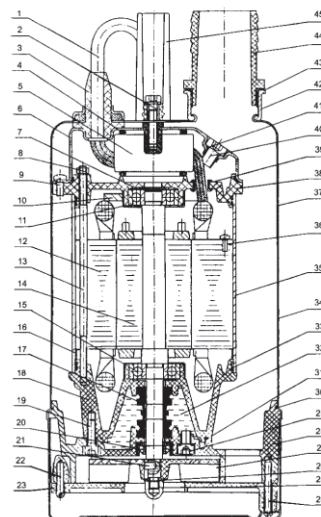

Performance table

Model	Capacity (m³/h)	Head (m)	Voltage / Frequency V / Hz	Output Power kW / hp	Discharge Size (mm)	NW (Kg)	GW (Kg)	Package Size (mm x mm x mm)
SS4 - 5 - 0.08	1.5 (Max: 4)	4.5 (Max: 5.5)	220V / 50Hz	0.08kW (1/10 hp)	25	3.3	3.5	120 x 120 x 315